

Product Information Packet

February 5, 2024

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	WPN-DA143TSJ-2C
Catalog Number:	BA2N1.5V4JM
Connection Diagram:	See Page 4
Outline Drawing:	See Page 3

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04

Marks:

MODEL NUMBER:	BA2N1.5V4JM	Estimated Weight:	50 Lbs
Outline Drawing:	See Page 3	Time Rating:	S1
Connection Diagram:	See Page 4	Enclosure:	TEFC
Design Code:	B	Encl Construction:	GP
Type:	KS	Ambient Max(°C):	40
Frame:	143JM	Alt Ambient Max(°C):	40
Phases:	3	Insulation Class:	F
Poles:	2	NEMA Design:	B
Output Power:	1.5HP	Nominal Efficiency:	84.0 %
RPM:	3490	Guaranteed Efficiency:	81.5 %
Voltage:	208-230/460	3/4 Load Efficiency:	84.2 %
Hertz:	60	KVA Code:	K
Amps - FL:	3.78/1.89	Max KVAR:	9
Service Factor:	1.25@60Hz	Power Factor:	87%
Alt Service Factor:	1.15	Bearing - DE:	6205-ZZC3
		Bearing - ODE:	6203-ZZC3

Enclosure is Totally Enclosed Fan-Cooled

Stamped Nameplate Notes:

12-60HZ CONSTANT TORQUE, 6-60Hz VARIABLE TORQUE

50HZ DATA:
190-200/400V
4.41/2.21AMPS
RPM 2905
SF 1.0

CSA APPROVED FOR CLASS I;DIVISION 2; GROUPS A, B, C & D,ZONE 2; GROUPS IIA & IIB T3 WITH VFD

Additional Information:

F1/F2/F3/ROUND BODY MOUNTING USING REMOVABLE/REPOSITIONABLE FEET
INVERTER DUTY: CT5:1(12Hz~60Hz)@100%TN, CT15:1(4Hz~60Hz)@66.7%TN, VT20:1

Performance Characteristics


Marks:

LOAD %	150.0	125.0	100.0	75.0	50.0	25.0
% EFF	81.88	83.15	84.01	84.24	83.16	77.62
% PF	90.33	89.40	87.11	83.23	74.17	52.49
AMPS(460V)	2.80	2.32	1.88	1.48	1.12	0.85

TORQUE(FL) LB-FT 3.01 TORQUE(LR)%FL 330 TORQUE(BD)%FL 423
 AMPS(LR 460V) 17.16 PF AT START 28

Other Useful Information for Application:

Rotor Inertia: Lb-Ft ² (Kg-m ²):	0.026(0.001)
Max load inertia: Lb-Ft ² (Kg-m ²):	
Load Type:	Square Torque/Speed Characteristic
Voltage:	100%
Number of starts per hour:	2 Cold or 1 Hot
Acceleration Time with maximum inertia (sec):	6.1
Safe stall time (sec): Cold/Hot	16/6

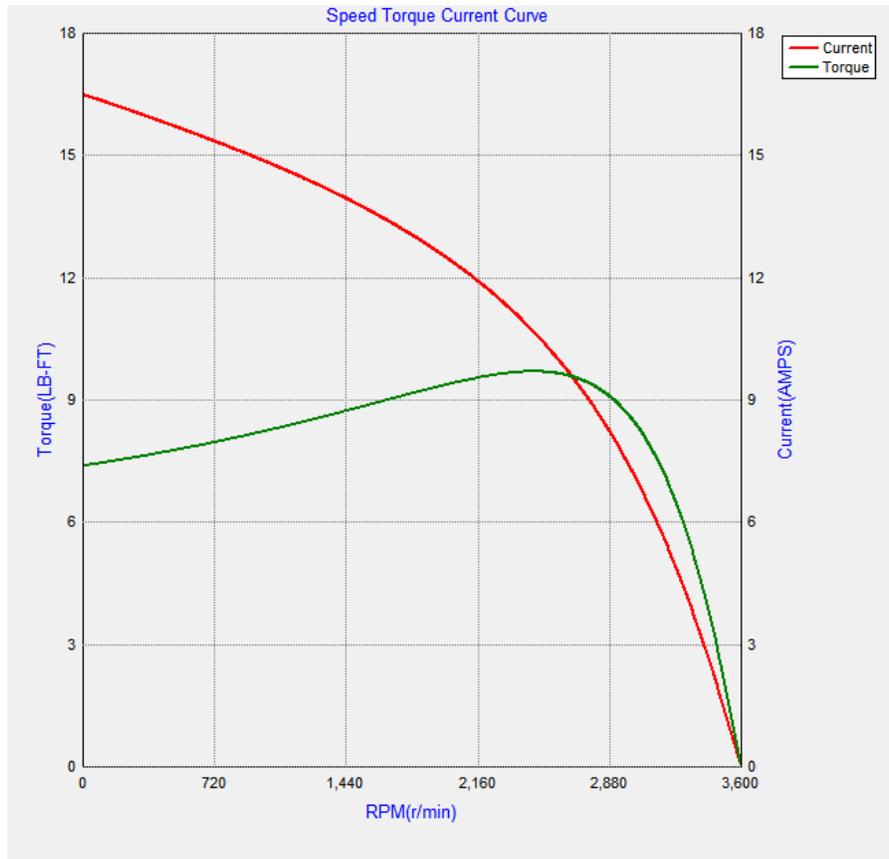

Marks:

Connection Diagram

