


MODEL	EF4N1.5-1
PART	
HP	1.5
RPM	1725
VOLTAGE	115/208-230
FRAME	56
FREQUENCY	60
CURRENT	14.6/7.3
EFF%	77%
POWER FACTOR	0.87
DUTY	CONT
SERVICE FACTOR	1.15
AMBIENT TEMP	40°C
INSULATION CLASS	F
RATED TORQUE	54.4LB.IN
LOCKED ROTOR TORQUE	157.81LB.in
BREAKDOWN TORQUE	136.6LB.IN
LOCKED ROTOR AMPS	88/44
KVA CODE	H
DE BEARING	6205RZ
ODE BEARING	6203RZ
ENCLOSURE	TEFC
PROTECTOR TYPE	MANUAL RESET
ROTATION	CCW/CW
BASE/FEET	RIGID

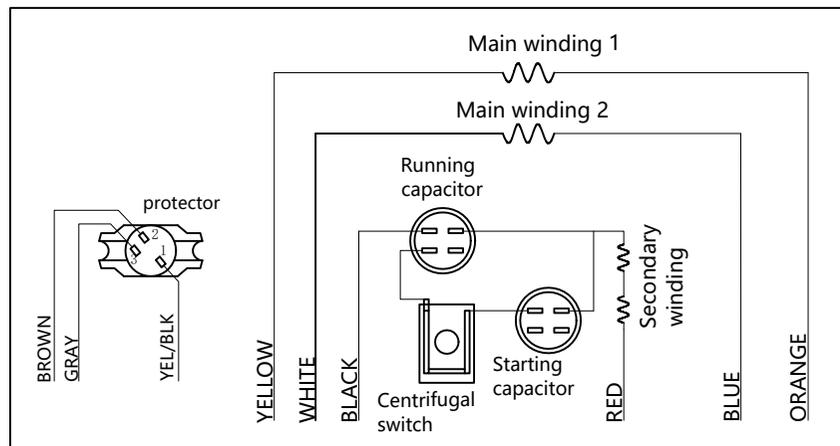

LOW VOLT	HIGH VOLT
YEL/BLK(P1) — LINE 1	YEL/BLK(P1) — LINE 1
BLUE(T1) — INS	BLUE(T1) — INS
GRAY(T6) — INS	GRAY(T6) — INS
RED(T8) — INS	RED(T8) — INS
BROWN(P2) — INS	BROWN(P2) — INS
ORANGE(T3) — INS	ORANGE(T3) — INS
BLACK(T5) — INS	BLACK(T5) — INS
WHITE(T2) — LINE 2	WHITE(T2) — LINE 2
YELLOW(T4) — LINE 2	YELLOW(T4) — LINE 2

ROTATION CW-OPE TO REVERSE EITHER VOLTAGE  
INTERCHANGED RED & BLACK LEADS.  
ACCEPTABLE FOR FIELD WIRING

						Brook Crompton		
Tag	Number	Rejigger	Signature	Date	Drawing mark	Weight	Scale	EF4N1.5-1
Designed		Standard						
Collated		Confirm						
Checked		Date			Total page	NO.	page	