

60HZ TECHNICAL DATA SHEET

CATALOG No: **HO2N020-4C**

ISSUED: 20-Mar-24

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
20	-	2	3600	254TC	230/460 V	60	3	IP23

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
ODP	F	1.15	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)	
Full Load	3/4 Load	1/2 Load	Full Load	
93.0	93.0	93.0	89.00	

Full Load Amps 460 V	Full Load RPM
23.0	3550


NEMA KVA Code	Bearing Size	
	Drive End	Non-Drive End
G	6309.00	6208.00

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Rating
-	6 - 60 Hz	Open Drip Proof
-	-	

Notes:

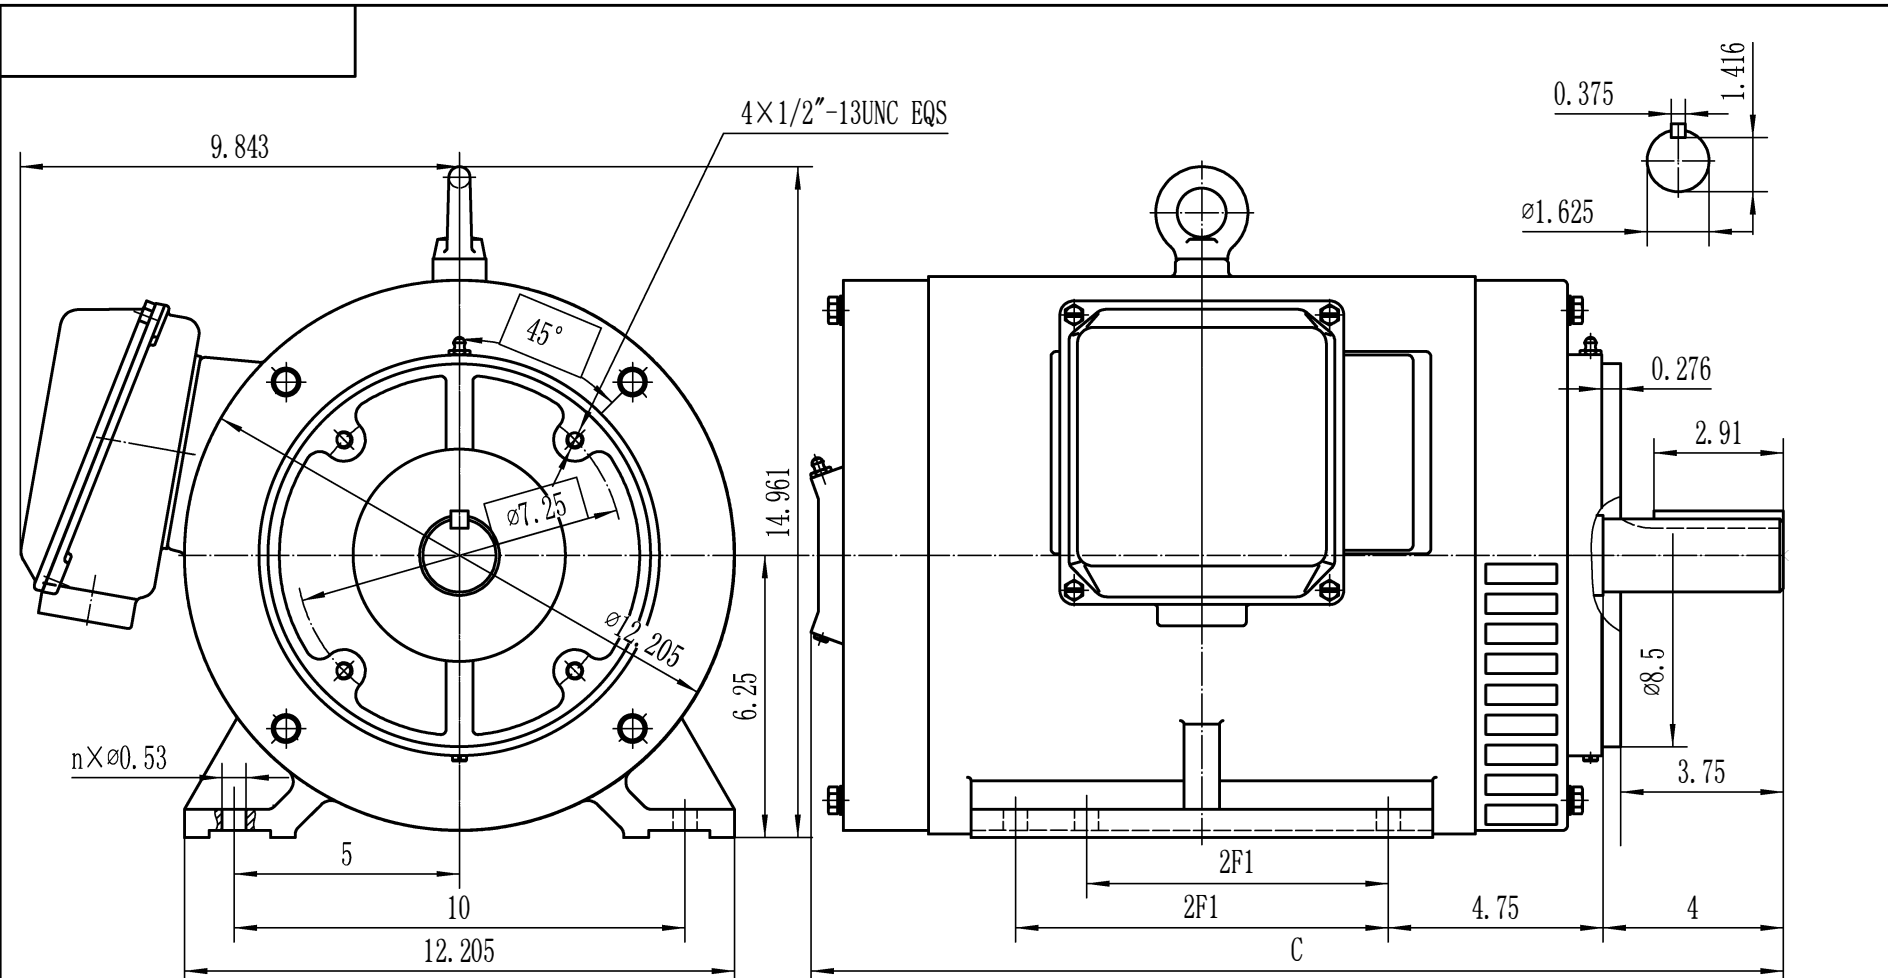


	2F	2F1	C	n	
N254TC;ODP	8.25		21.457	4	
N256TC;ODP	10	8.25	23.031	6	


MARK	NUMBER	DOCUMENTARY NUMBER	SIGN	DATE
DESIGN		TECHNICS		
DRAWN		STANDARD-IZATION		
COLLATE		APPROVE		
AUDITING		DATE		

BROOK CROMPTON
Keeping Industry Turning

DRAWING MARK	NUMBER	WEIGHT	PROPORTION
			1:4
TOTAL PAGE		NO.	
N250TC;ODP			

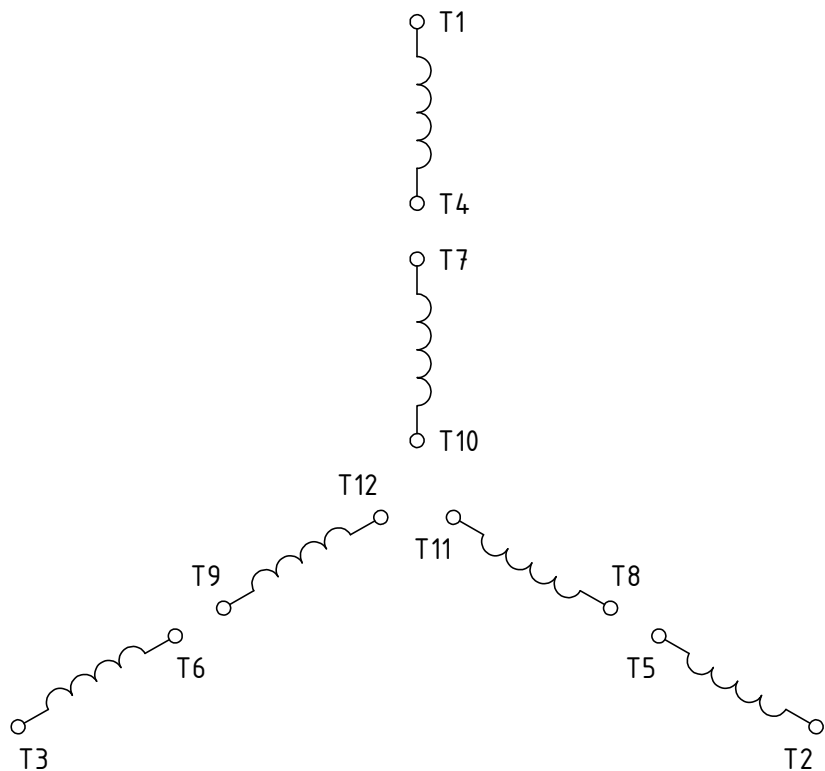

STAR/WYE START — DELTA RUN

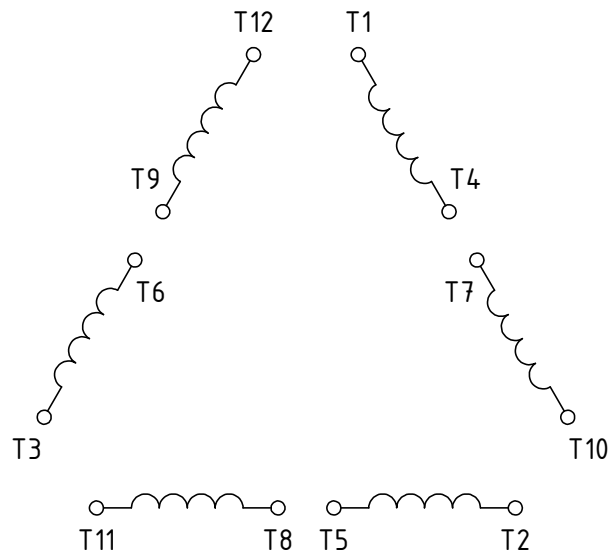

DIRECT ON LINE

VOLTAGE		L1	L2	L3	JOIN
LOW	START	T1,T7	T2,T8	T3,T9	T4&T5&T6 T10&T11&T12
	RUN	T1,T6, T7,T12	T2,T4, T8,T10	T3,T5, T9,T11	
HIGH	START	T1	T2	T3	T4&T7; T5&T8; T6&T9; T10&T11&T12
	RUN	T1,T12	T2,T10	T3,T11	T4&T7; T5&T8; T6&T9

VOLTAGE	L1	L2	L3	JOIN
LOW	T1,T6, T7,T12	T2,T4, T8,T10	T3,T5, T9,T11	
HIGH	T1,T12	T2,T10	T3,T11	T4&T7; T5&T8; T6&T9

Description
CONNECTION DIAGRAM, NEMA MARKINGS
DUAL VOLTAGE, SERIES-PARALLEL DELTA

Drawing No.
12L-33582-N

**BROOK
CROMPTON**
Keeping Industry Turning